















The corner kits are used in addition to standard flashing kits as shown below. This document must be read in conjunction with the universal flashing installation manual (80032).



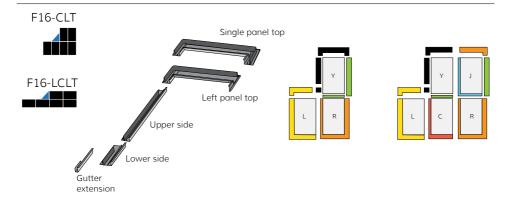


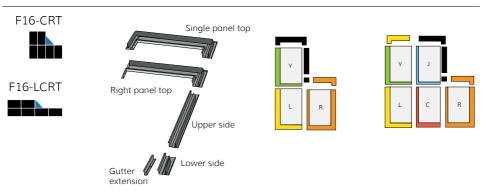


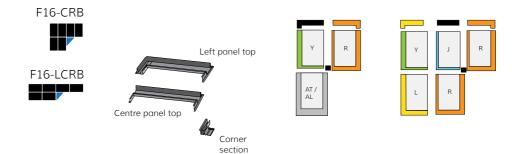

1



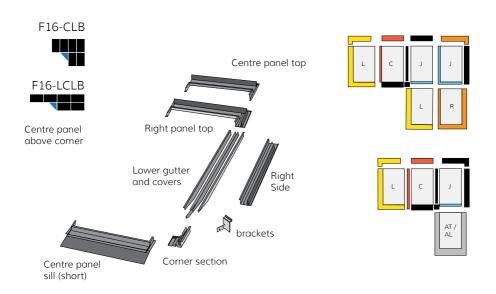


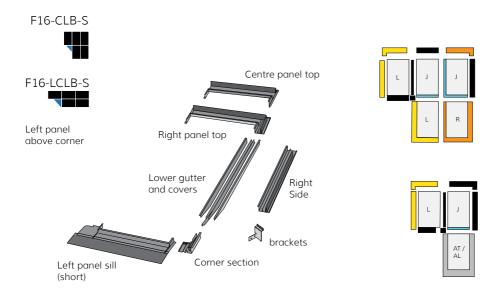






Brackets for securing the upper panel and side flashing tabs are in the Y flashing kit.

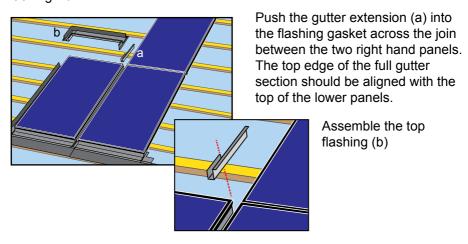

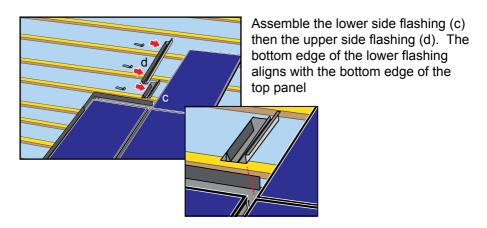

The kit contains top flashings for either a single panel or a left panel. Use the flashing suitable for the array and discard the other.

3











**BLUE STRIPE BOX** 

Brackets for securing the upper panel and side flashing tabs are in the Y flashing kit.



Push the gutter extension (a) into the flashing gasket across the join between the two left hand panels. The top edge of the full gutter section should be aligned with the top of the lower panels.

> Assemble the top flashing (b)

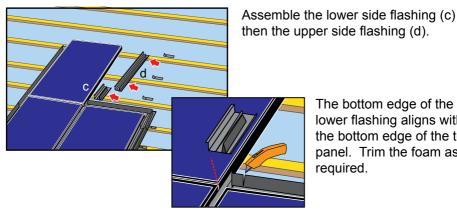

The bottom edge of the lower flashing aligns with the bottom edge of the top panel. Trim the foam as required.

The kit contains top flashings for either a single panel or a right panel. Use the flashing suitable for the array and discard the other.











**ORANGE STRIPE BOX** 

The corner section (a) is assembled before the sill flashing (b). Align the top face of the corner section with the bottom of the panel above it. Push the edge of the corner section into the panel gasket across the join between the two left hand panels.






Continue with the gutter flashing between the upper panels in the normal way.


The kit contains a left top and centre top flashing to complete the array. Use the top flashing that suits the array and discard the other.







Left Bottom Corner

Install panels in columns from bottom to top, starting with the left column and moving to the right



The kit contains a shortened sill flashing (b) for the panel to the left of the corner. The CLB kit has a centre sill flashing to replace the sill flashing from a TC kit. The CLB-S kit has a left sill flashing to replace the sill from a TL kit.





The corner section (a) is assembled before the sill flashing (b). Align the top face of the corner section with the bottom of the panel above it. Push the edge of the corner section into the panel gasket across the join between the two right hand panels.

A lower gutter and covers for the gap between the two panels above the corner is provided in the kit.

The kit contains a side flashing, side brackets and a right top and centre top flashing to complete the array. Use the top flashing that suits the array and discard the other.



## Clearline 袋fusion

Need the help of a Marley Approved Solar Expert and Solar Fitter, as well as more helpful tools?

Contact us: 010 600 0284 Email: marleyroofing.co.za

Visit our website www.marleyroofing.co.za or scan this QR

Follow us!











