

Marley M11 Ultra Roof & Wall Paint

This highly durable roof coating with a 10-year quality guarantee, ensures all-round weather protection. Its enhanced Acrylic Formulation delivers excellent UV Resistance, flexibility and adhesion for long lasting sealed protection.



SPREAD RATE:	6-8m ² per litre
APPLICATION:	Brush, Roller, Spray
CLEANING:	Water
DRYING:	+ - 4 Hours
COATS:	2 *White 3

ADVANTAGES:

- > Acrylic Formulation – Highly durable roof & wall formulation with a 10-year guarantee
- > All weather & UV Resistant – Colour fast, dirt shedding and impervious to water that keeps your roof looking better for longer
- > Excellent Adhesion & Flexibility – Paint film remains intact during expansion and contraction for long lasting sealed protection
- > Multiple Application Methods – Ready to use for airless spray, brush or roller application. No thinning required!

PRODUCT CODES:

PM1BU20AM	M11 ULTRA AMBER 20L
PM1BU05AM	M11 ULTRA AMBER 5L
PM1BU20BR	M11 ULTRA BROWN 20L
PM1BU05BR	M11 ULTRA BROWN 5L
PM1BU20EG	M11 ULTRA EMERALD GREEN 20L
PM1BU05EG	M11 ULTRA EMERALD GREEN 5L
PM1BU20BL	M11 ULTRA MIDNIGHT BLACK 20L
PM1BU05BL	M11 ULTRA MIDNIGHT BLACK 5L
PM1BU20MG	M11 ULTRA MORELAND GREEN 20L
PM1BU05MG	M11 ULTRA MORELAND GREEN 5L
PM1BU20RE	M11 ULTRA RED 20L
PM1BU05RE	M11 ULTRA RED 5L
PM1BU20SL	M11 ULTRA SLATE 20L
PM1BU05SL	M11 ULTRA SLATE 5L
PM1BU20TC	M11 ULTRA TERRACOTTA 20L
PM1BU05TC	M11 ULTRA TERRACOTTA 5L
PM1BU20WI	M11 ULTRA WHITE 20L
PM1BU05WI	M11 ULTRA WHITE 5L

PACKAGING INFORMATION:

Please note!

> Measurements and weights below are approximate values and may vary slightly from batch to batch!

Pack sizes:	20L, 5L
Pack dimensions:	20L (base diameter = 263mm, pail only height = 375mm, pail with lid = 377mm) 5L (base diameter = 174mm, pail only height = 238mm, pail with lid = 239mm)
Weight per pack:	20L = 23.7kg, 5L = 6kg
Pallet only size & weight:	1,2m x 1m 0.15m (23kg) (Two-way entry, suitable for moving with pallet jack)
Pallet configuration:	24 x 20L per pallet (566.80kg excluding pallet weight) 120 x 5L per pallet (720kg excluding pallet weight)

PRODUCT INFORMATION:

Appearance:	Low Sheen
Resin Base:	Acrylic resin emulsion
Film Thickness:	30-40 microns per coat
Drying Time:	Touch dry: + - 1 hour Hard dry/recoating: + - 4 hours
Spreading Rate:	Approx. 6-8m ² per litre. Please note! Spreading rate varies with porosity, type of substrate and roof profile. For uncoated new surfaces we recommend 5-7 m ² per litre for the first coat and 7-9 m ² per litre for subsequent coats. The latter applies to sealed and previously painted substrates as well.
Packaging sizes:	This product is available in paint pails of 5 and 20 litres.


Colour Range: True match to Marley M22 and M11 ready-painted Roof Tiles in: White, Emerald Green, Moorland Green, Slate, Red, Terracotta, Midnight Black, Brown, Amber.

Marley M11 Ultra in "White" may be tinted to light, pastel based colours. Mid to Dark tinted colours are not recommended!

***Please note! Our guarantee only applies to our ready-mixed colour range!**



White

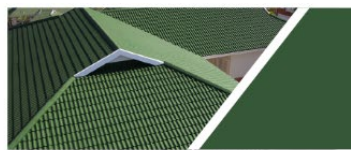

Emerald Green



Mooreland Green



Slate



Red



Terracotta



Midnight Black



Brown



Amber

APPLICATION INFORMATION

> To ensure colour uniformity please check paint batch numbers. We recommend purchasing colours from the same batch, if this is not possible, mix different paint batches with one another in a separate clean container. Batch numbers are allocated at the back of the paint pail as an applied sticker with a barcode.

> Stir well before use! Preferably with a flat paddle.

> Application Methods include brush, roller, or spray application. For airless spray application, at 110-120Ku we suggest a spray tip of 21 or 23 thou Tip and a pressure setting of about 3000 PSI- circa 200 Bar. Should you find that the product does not spray easily increase the Tip size and pressure.

> Thinning – this product is ready to use un-thinned! Thinning is not recommended, except on absorbent surfaces. Please note that thinning will reduce the opacity

(hiding power) of this paint. Where thinning is required, the first coat may be thinned up to 10% with water.

> Drying Time - Touch dry 60 minutes. Allow to dry 3-4 hours before recoating. Please note, it is recommended to extended drying times during cold, wet, or humid conditions.

> 2 Coats of Marley M22 Ultimo must be applied as a minimum requirement to achieve a closed film and solid colour. For the colour "white" – 3 coats are required to achieve a closed film and solid colour.

> Clean paint application tools and equipment immediately after use - remove as much product as possible, and then clean with tap water.

> Do not apply before 09:00 and after 16:00 in the winter.

> Do not apply exterior if it looks like rain will occur within 4-6 hours of application.

> Coats Required - apply two to three finishing coats to new and previously painted surfaces.

> The quantity of paint required to coat a roof, can be obtained by measuring the floor area of the house covered by the roof, including the overhang. Additional allowance of + 30% must be made for the pitch of the roof, plus 30% for the profile (shape of roof tiles, corrugations etc.). Divide the total area by the spreading rate of the paint to give an indication of the paint requirements per coat. Make allowance for thinning of the primer coat.

GENERAL SURFACE PREPARATION

> Ensure that surfaces are sound and free from dust, oil, grease, dirt, and debris.

> Surfaces must be thoroughly dry - no more than 12% moisture content.

> Surfaces must be prepared and primed to ensure good adhesion and longevity of the full paint system.

Please note! Marley Roofing will not accept any liabilities if Marley M11 Ultra fails due to improper surface preparation or application!

PREVIOUSLY PAINTED SURFACES

> Make sure old paint coatings are firm and solid.

> Remove all loose, flaking, and bubbling paint.

> Remove all dust, grease, foreign material, fungal and algae growth. Allow to dry.

> If surfaces remain powdery or friable, seal with Bonding Liquid or Plaster Primer, followed by two to three coats of Marley Premium M11 Ultra.

RUSTED METAL

- > Affected areas need to be cleaned back to bright metal and spot primed with a Water-based Metal Primer.
- > Remove collected sand and dust from the area.
- > Apply two coats of Marley M11 Ultra.

NEW METAL

- > Degrease surfaces with a Galvanized Iron Cleaner to remove the manufacturer's grease protective layer. This process is repeated until the surface is water break free.
- > Rinse well with potable water.
- > Prime the clean degreased metal with a Water-based Metal Primer.
- > Apply two coats of Marley M11 Ultra.

WOOD

- > Prime With Universal/GP Undercoat/Pink Wood Primer
- > Lightly Sand, wipe off dust
- > Apply two coats of Marley M11 Ultra.

UNCOATED CEMENT PLASTER SURFACES

- > Remove dust, foreign material, fungal and algae growth.
- > Fill all visible cracks and seal with Water Based Plaster Primer.
- > Apply two coats of Marley M11 Ultra.

FIBRE CEMENT SURFACES (UNCOATED, WEATHERED OR NEW)

- > Remove dust, foreign material, fungal and algae growth.
- > If friable or powdery, seal with Bonding liquid or Water Based Plaster Primer
- > Apply two coats of Marley M11 Ultra.

ADDITIONAL INFORMATION

> Storage Conditions - store under cool dry conditions away from direct sunlight, heat and extreme cold.

> Disclaimers - colour references are as accurate as printing will allow.

Please refer to the in-store colour displays for an accurate representation of the colour. *Among others, the following factors may affect final colour appearance: product sheen and texture, colour and light reflections, application, surface texture and preparation. For best colour and sheen consistency, it is advisable to use containers of the same batch number, or to mix different batches together in a large clean container. For walls - to finish in a corner before starting a new container.

GUARANTEE

Marley Roofing offers a 10-year product guarantee on Marley M11 Ultra. (White and standard ready-mixed colours only!). Marley M11 Ultra when tinted is not guaranteed, as Marley Roofing does not offer tint bases in the Marley M11 Ultra range. To register your guarantee, simply call Marley Roofing's Technical Paint Department within 30 days of purchase or send us your guarantee application via our website. Basic requirements to register your guarantee include supplying us with your contact details, the site details, purchase details, applicator's details (person or contractor who painted), batch number/s and related products used. Your successful application will receive a Guarantee Reference Number that you should record and keep in a safe place, together with your purchase slip for future reference.

For more information as well as terms and conditions of the guarantee, please visit www.marleyroofing.co.za or contact Marley Roofing's Paint Technical Helpline 076 102 3432.

STANDARD DISCLAIMER PERTAINING TO THIS TECHNICAL DATASHEET (TDS)

The recommendations contained herein are given in good faith and meant to guide the specifier or user in accordance with good painting practices. They are gained from our tests and experiences and are believed to be accurate and reliable. No warranty/guarantee is implied by the recommendations contained herein since the conditions of use; application method, substrate and cleanliness of the substrate are beyond Marley Roofing's control.

Important Note: Technology may change with time, necessitating changes to this Technical Data Sheet (TDS).

It is the responsibility of the user to ensure that the latest TDS is being used for reference. Marley Roofing Technical Data Sheets are available on our website www.marleyroofing.co.za or please contact us at 010 600 0284.

Email info@marley.co.za

Marley SA (Pty) Ltd trading as Marley Roofing, is a member of the Ubora Group, the industrial division of Kutana Group of Companies.

CONTACT DETAILS:

Call: 010 600 0284

Email: info@marley.co.za

Web: www.marleyroofing.co.za or scan QR code below:



Follow us:



<https://www.facebook.com/MarleyRoofingZA>

<https://www.linkedin.com/company/27058241/>